

Figure C.6-69. Alternate Berth diesel (ES-Alt-30K-d): Maximum mass (g/m²) of oil on the shoreline for the worst run to the California mainland shore.

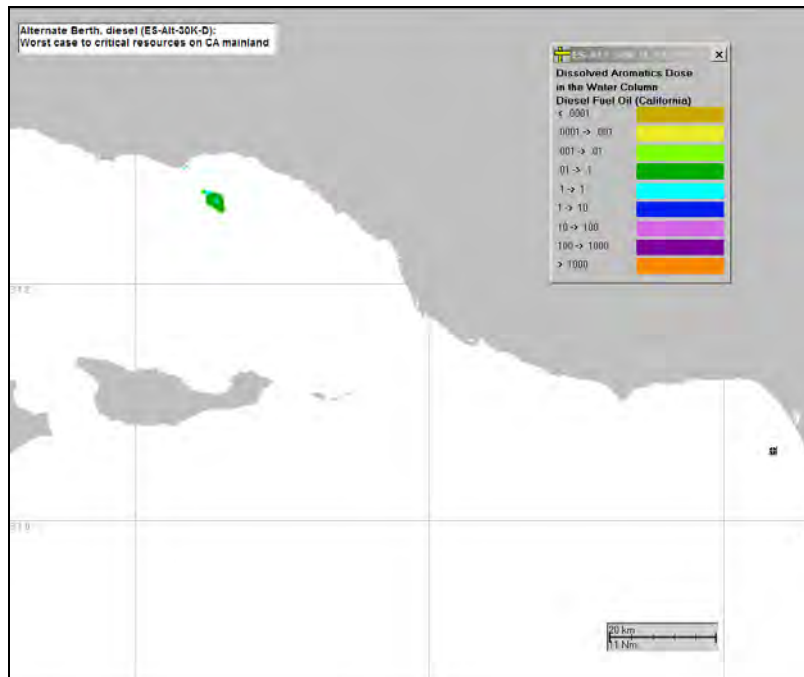


Figure C.6-70. Alternate Berth diesel (ES-Alt-30K-d): Dose (ppb-hrs) of dissolved aromatics in the water column for the worst run to the California mainland shore.

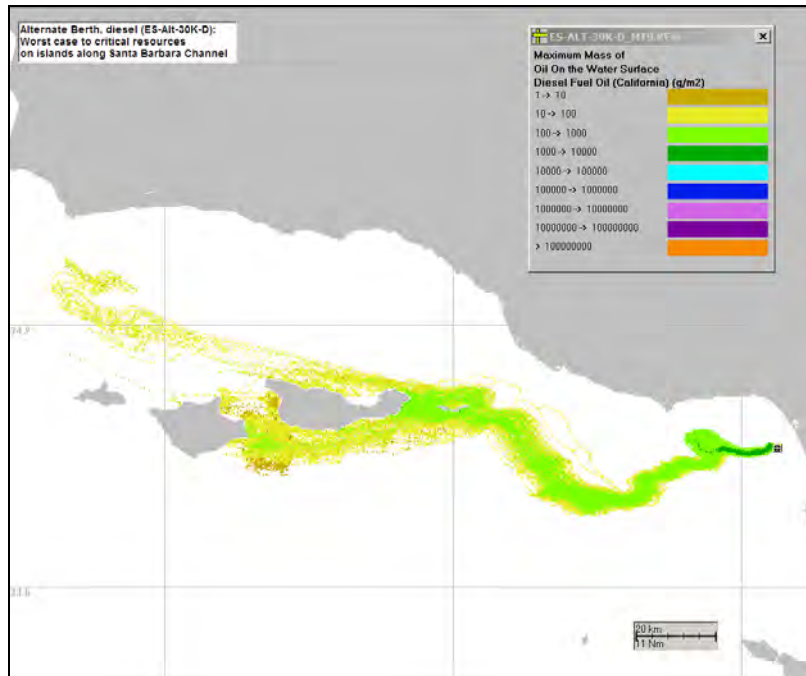


Figure C.6-71. Alternate Berth diesel (ES-Alt-30K-d): Maximum exposure at any time to floating oil (g/m^2) for the worst run to the islands along Santa Barbara Channel.

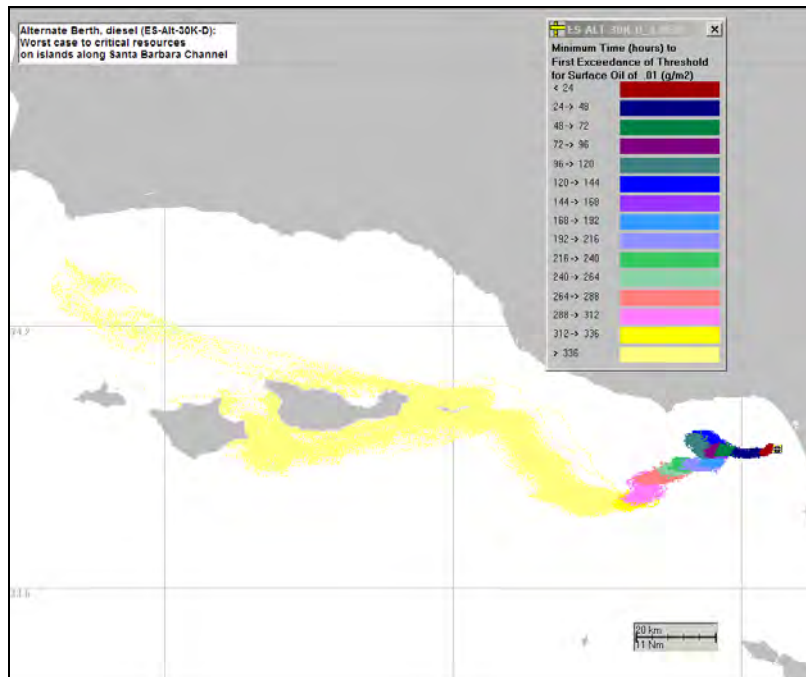


Figure C.6-72. Alternate Berth diesel (ES-Alt-30K-d): Minimum time to first exceed threshold for surface oil (0.01 g/m^2) for the worst run to the islands along Santa Barbara Channel.